

140
L/W

BASE LED LOW BAY




Base Led family of low bays lights designed for illumination of interior premises in hangars, warehouses, cold storage facilities, passages, production premises etc.

Ideal to use in any environment with heights 2,5m to 8m.

PURE LIGHT

BASE LED LOW BAY SPECIFICATION




Operating Voltage 198 ~264VAC
 Overvoltage Protection 320V AC, 48h
 Burst/Surge Protection up to 2kV
 Power Factor > 0.97
 CRI +70 / +80
 Supplied with 60° and 90° beam angle optics
 Colour temperature 3000K, 4000K optional
 Weight: 1.1kg


LED Code L80B10

Light Diagram


30° - 60° - 90°




Asymmetric



Batwing



Double asymmetric



Product Code	Power	Colour temperature	Luminous Flux (Lm)
Base Led 16	16W	5000K	2 350
Base Led 22	22W	5000K	3 500
Base Led 32	32W	5000K	4 700
Base Led 44	44W	5000K	7 000
Base Led 56	56W	5000K	8 250


Optional items Code Image

Side mount hanger bracket CS00161-005-11

High transmission diffuser transparent 94 %
 High transmission diffuser semi-transp 87 %
 High transmission diffuser matt 76 %

DALI2 driver DALI2

D4i driver / Awada LMS Wireless D4i

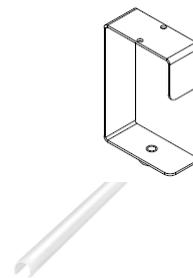

Base Led Low bay lights can be combined in clusters with 2, 3 and 4 luminaires in set. Each light can be turned on angle of 15°, 30° and 45° and fixed in its position


362 mm

256 mm


150 mm

106mm

Cluster 4

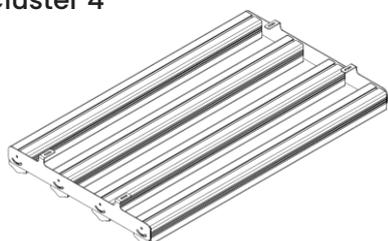

Cluster 3

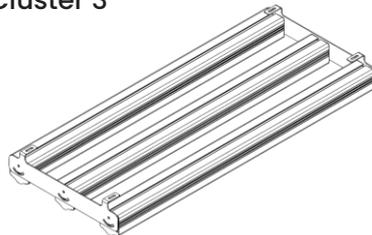

Cluster 2



PURE LIGHT